
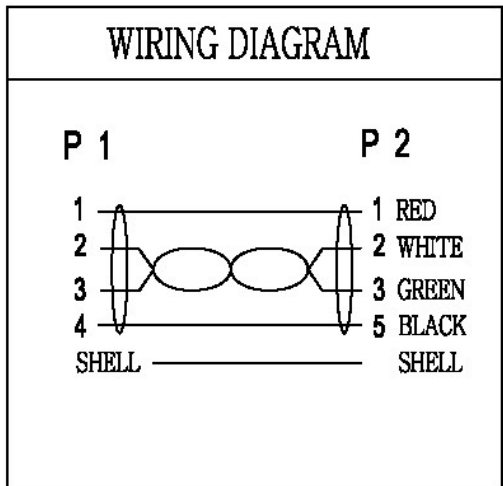


REVISION			
REV	DATE	DESCRIPTION	APPRO.BY

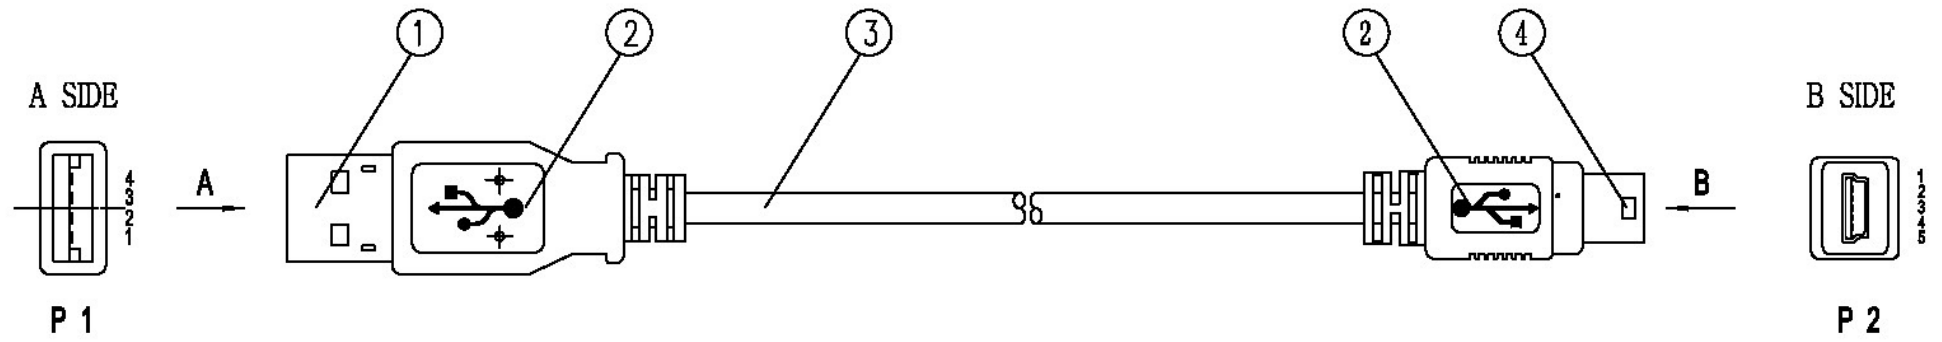

GREY	
EFB NO:	Length
K5250.1,5	1500mm±30mm
K5250.3	3000mm±50mm

- NOTE:**
1. ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE IS NOT PERMITTED
 2. KEEP CLEAN
 - 3.PRINTING:AWM 80 C 30V VW-1
28AWGx1P 28AWGx2C USB2.0
HIGHSPEED CABLE
 - 4.ROHS COMPLIANT

4	CONNECTOR	MINI USB 5Pin B TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
3	CABLE	28AWG TXR*1P+ 28AWG TXR*2C+ AL+ B(COVERAGE RATE IN 65%) USB2.0 HIGHSPEED CABLE JACKET PVC GREY OD=4.5±0.1mm	1 Set
2	OVERMOLD	PVC COLOR:GREY	10g
1	CONNECTOR	USB A TYPE MALE NICKEL PLATED SHELL 1u" GOLD PLATED PIN,WHITE INSULATOR	1 Set
NO.	MAT.NANE	DESCRIPTION	Q'TY

CUSTOMER'S ITEM		K5250.X	CUSTOMER	EFB	
DRAWING			TITLE	USB CABLE	
UNIT	mm	SCALE	1:1	REV	
DRAWN BY	CHECK BY	APPRO BY	DATE		
			20-10-2007		