


REVISIONS


| REV | DATE | DESCRIPTION | APPRO. BY |
|-----|------|-------------|-----------|
|     |      |             |           |

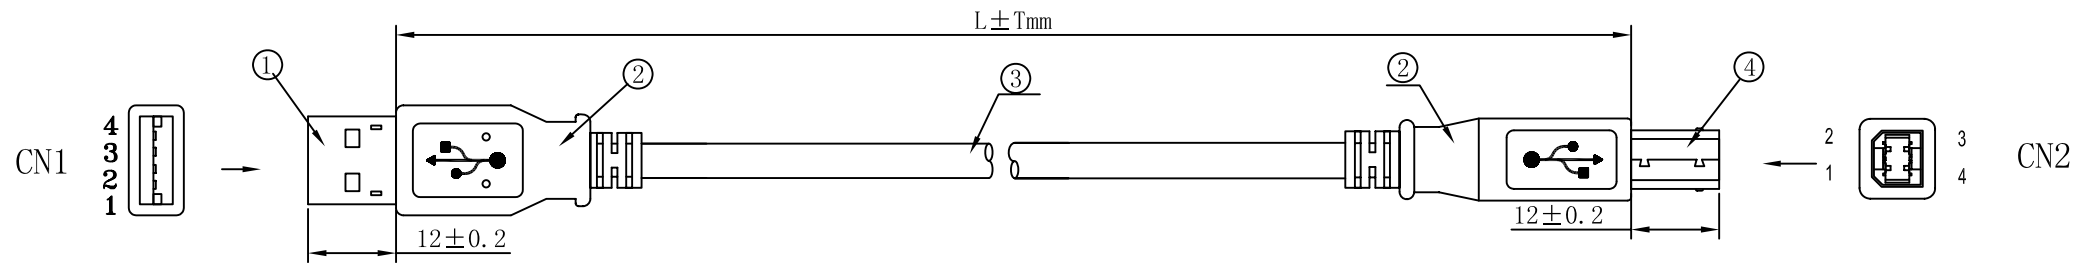

NOTE 1:

| GREY        |             |
|-------------|-------------|
| ITEM NO.    | LENGTH      |
| K5255. 0, 5 | 500 ± 5mm   |
| K5255. 1    | 1000 ± 10mm |
| K5255. 1, 5 | 1500 ± 15mm |
| K5255. 1, 8 | 1800 ± 18mm |
| K5255. 3    | 3000 ± 30mm |
| K5255. 5    | 5000 ± 50mm |

PIN OUT

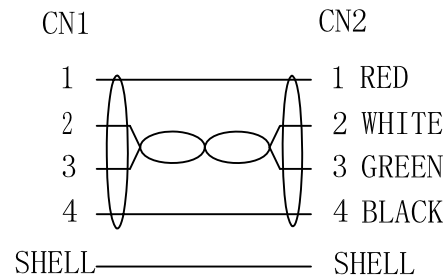

NOTE:

1. PRINTING: AWM 80° C 30V VW-1 28AWGx1P  
24AWGx2C USB2.0 HIGHSPEED CABLE
2. RoHS compliant.
3. Operating Temperature: -15°C-80°C

|     |           |   |       |
|-----|-----------|---|-------|
| 4   | CONNECTOR | USB B TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR        | 1 Set |
| 3   | CABLE     | 28AWG*1P+24AWG*2C+AL+B USB2.0 HIGHSPEED CABLE<br>JACKET: PVC/GREY OD: 4.5 ± 0.2mm | 1     |
| 2   | OVERMOLD  | PVC COLOR: GREY   | 10g   |
| 1   | CONNECTOR | USB A TYPE MALE, NICKEL PLATED SHELL, 1U" GOLD PLATED PIN, WHITE INSULATOR        | 1 Set |
| NO. | MAT. NAME | DESCRIPTION   | Q' TY |

|                 |          |          |              |     |
|-----------------|----------|----------|--------------|-----|
| CUSTOMER'S ITEM | K5255. X | CUSTOMER | EFB          |     |
| DRAWING         |          | TITLE    | USB CABLE    |     |
| UNIT            | mm       | SCALE    | 1:1          | REV |
| DRAWN BY        | CHECK BY | APPRO BY | DATE         |     |
|                 |          |          | 2013. 04. 10 |     |