
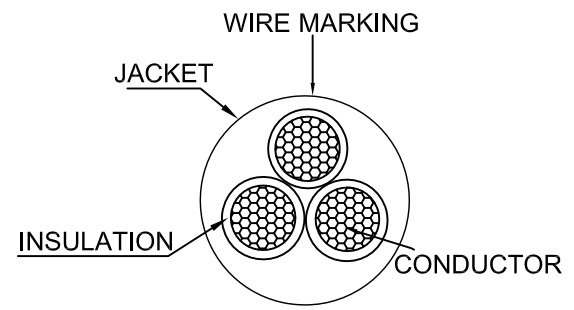


| | | | | | | | | | |
|-------------------|---|----|---|---|---|-------------|-----|-------------|------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
| CUSTOMER NAME | | 資擎 | | | | DATE | REV | DESCRIPTION | BY |
| CUSTOMER Part No. | | | | | | 2013. 4. 7 | A/0 | NEW | Lisa |
| | | | | | | 2013. 4. 12 | A/1 | 增加ITEM | Lisa |

| | | | |
|-------------|-----|-------------|------|
| 7 | 8 | 9 | 10 |
| DATE | REV | DESCRIPTION | BY |
| 2013. 4. 7 | A/0 | NEW | Lisa |
| 2013. 4. 12 | A/1 | 增加ITEM | Lisa |

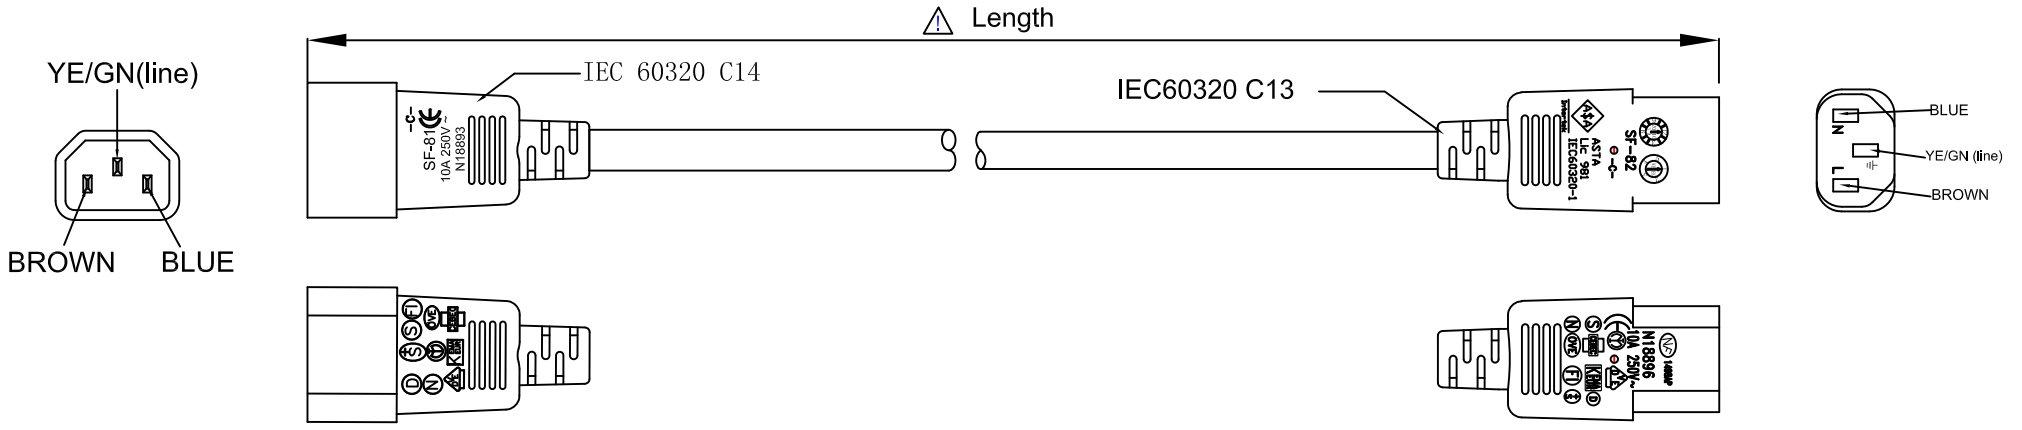

WIRE MARKING: + 0 + 0 + 0 KEMA-KEUR (OVE) (S) (N) (D) (FI) Δ CEBEC 972 <VDE> NF-USE 1345
(HOLLOW) IEMMEQU H05VV-F 3G0.75MM² V-75 300/500V ORDINARY DUTY NSW17436

REMARKS:

- 1.PLUG(SF-81) RATED POWER:250V 10A
- 2.CONNECTOR(SF-82) RATED POWER:250V 10A
- 3.WIRE: H05VV-F 3G0.75mm² RATED VOLTAGE:300/500V
- 4.COLOR:BLACK
- 5.DVW TEST:2000VAC,1S
- 6.POLARIZATION AND CONTINUITY TEST

| | | | | | | |
|------------------------------------------------------------------|--------|--|-------------|-----|-------------------------------------------|---------|
| PAGE | 1/1 | | | | | |
| Key Size | △ | | | | | |
| ROHS COMPLIANT | | | | | | |
| Unless specified on the drawing, tolerances are per the follows: | | | Part No. | | SF-81+SF-82 H05VV-F 3G0.75mm ² | |
| .X | ± 0.5 | | | | | |
| .X | ± 0.1 | | | | | |
| .XX | ± 0.05 | | | | | |
| 3RD | | | Description | | | |
| | | | DEP. | R&D | APPROVAL | CHECKER |
| | | | SCALE | | | DRAW |
| | | | UNIT | mm | | Lisa |