

Magnetic Lighting Unit



Compact lighting unit with magnetic fixing

The compact lighting unit was designed especially for the use in cabinets and housings with electrical/electronic devices.


Due to the magnetic fixing the unit can be mounted easily at each desired place in the cabinet.

Easy inserting of a 35 mm DIN rail makes it possible to use the lighting unit also in plastic, aluminium or stainless steel cabinets and housings with screw fixing.

The integrated socket allows the use of an auxiliary electrical device.

Technical Data:

Light intensity	900 Lm
Illuminant	energy saving lamp with integrated starter (11 W)
Lifetime	5.000 h
Operating voltage	AC 230 V, 50 Hz
Rated current	16.0 A
Protection class	I (grounding conductor)
Socket	Germany/Russia
Switch	On/Off switch for light
Connection	3-pole terminal 2.5 mm ² with strain relief, tightening torque 0.8 Nm max.
Fixing	magnetic fixing
Housing	plastic housing, light grey
Dimensions	355 x 65 x 70 mm
Weight	ca. 1 kg
Mounting position	any
Operating temperature/ storage temperature	-20 up to +50 °C (-4 up to 122 °F)/ -45 up to +70 °C (-49 up to 158 °F)
Degree of protection	IP20
Accessories	bezel
Approbation	VDE

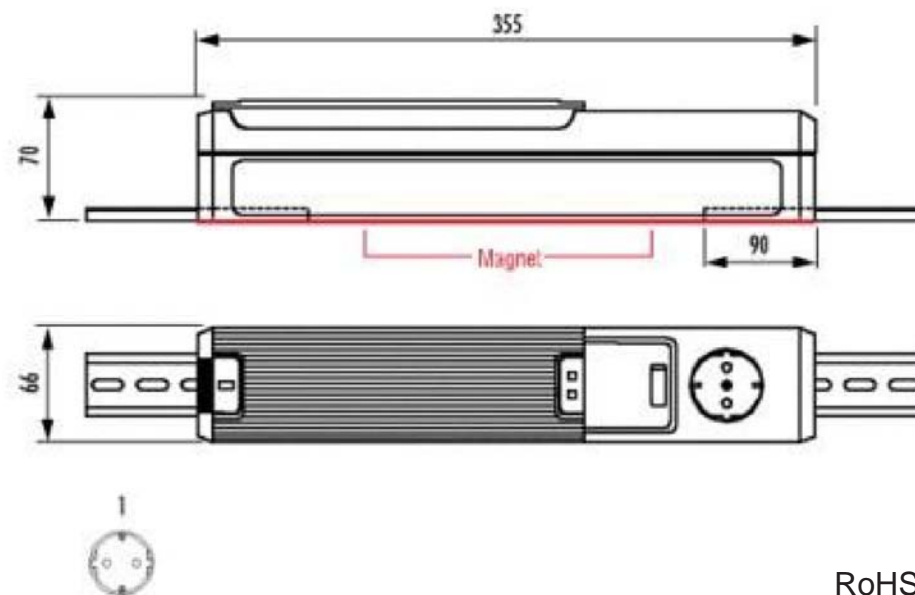

RoHS
compliant

Created MN	Date 25.03.10
Last rev. MN	Date 25.03.10

Magnetic lighting unit

698022

File: 698022_ENG

