




P1: M-942H

Customer No: No.6

P2: M-Y930A  
M-930B

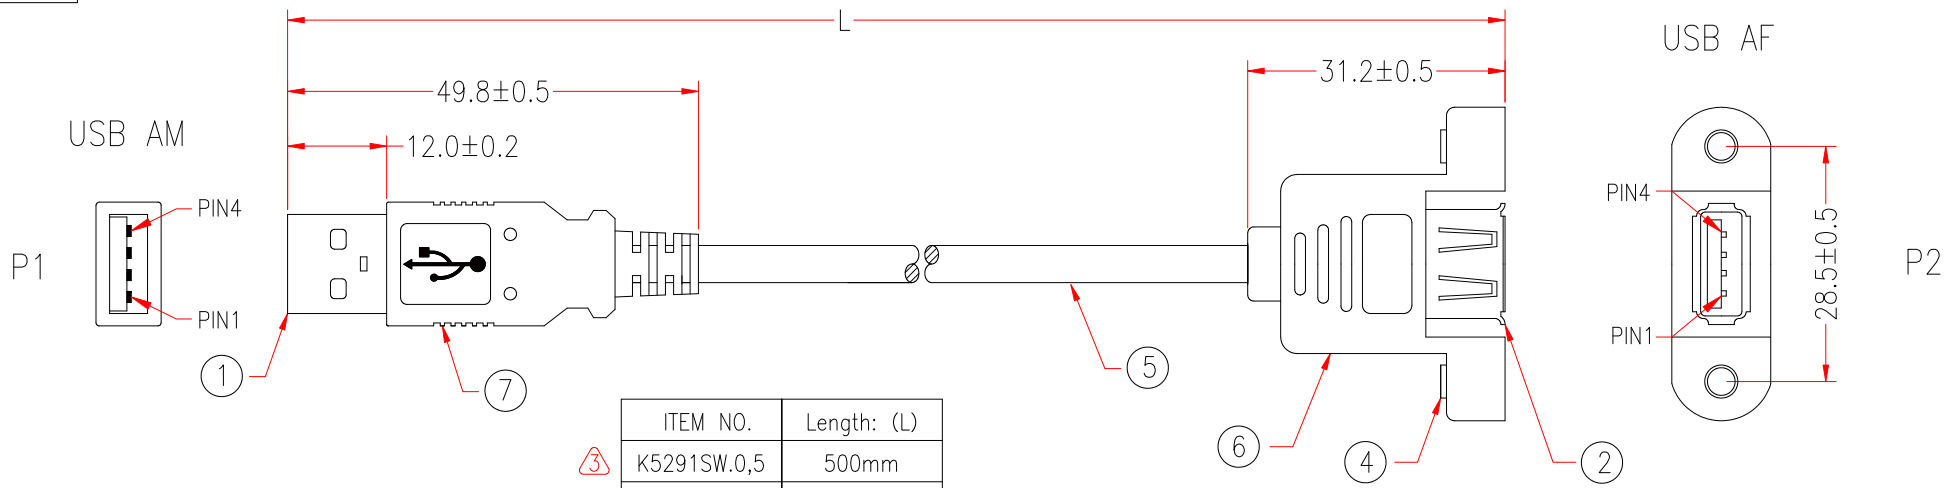

ITEM NO.	Length: (L)
K5291SW.0,5	500mm
K5291SW.1	1000mm
K5291SW.1,8	1800mm
K5291SW.2,2	2200mm
K5291SW.3	3000mm



SCREW 5.5\*8mm(2pcs)

9735-1			
P1		P2	
1	—	1	RED 24#
2	—	2	WHITE
3	—	3	GREEN
4	—	4	BLACK 24#
SHIELD	—	SHIELD	

\* NOTE: All relevant materials are complied with RoHS directive .

No.	DESCRIPTION	Q'TY	Supplier
7	MOLDED PVC BLACK		M304
6	BLACK HEAT SHRINK RUBE $\phi$ 1.0*8mm	1	M959
	MOLDED PE COLOR TRANSPARENT		M280
5	MOLDED PVC BLACK		M304
	USB 2.0 CABLE, UL STYLE 1 TWISTED PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BLACK, DRAWING No. EUAB2801P2402C-015	L-20mm	M304
4	HEX-NUT 5*7.7mm, #4-40	2	M95
3	SCREW #4-40 5.5*8mm	2	M95
2	USB A FEMALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR	1	M108
1	USB A MALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR, SHORT A PIERCE TYPE	1set	M108

PART NO. 9735-1		Revision:	
APPROVED			
CHECKED	HU		
DRAWING	MAO		
DATE	09/JUL/12	ITEM NO.	K5291SW.X
		UNIT:mm	

RE.4	2012.7.09	MODIFY ITEM NO. K5291SW.2,2
RE.3	2009.1.07	MODIFY ITEM NO. K5291SW.0,5
RE.2	2008.2.12	MODIFY LENGTH FOR 2M TO 1.8M
RE.1	2008.1.25	MODIFY ITEM NO. K5291SW.3